STANLEY®
Security Solutions

3 SERIES

PADLOCKS

Distributed By

DHPACE
Everything Doors Since 1926

DH Pace National Key Service Center
855-237-3667
BestSolutions@dhpace.com
DHPace.com/BestSolutions

STANLEY BEST ACCESS SYSTEMS

TABLE OF CONTENTS

	Page
General Information	2
Shackle Chart / Patented Keying	2
11B/12B Series	3
21B/22B Series	4
41B/42B Series	5
21BSH Shroud Option	6
21JB Series Cable	7
Lockout/Tagout	8
Accessories / Options / Tools	9, 10
Repair and Parts Exploded Views	11

GENERAL INFORMATION

The heart of every Best Access Systems padlock is a standard key removable core which is interchangeable throughout most of the entire line of BESTproducts. This standardization permits BEST locks of any type, size or style to be masterkeyed into one system which can expand to include future locking needs.

B SERIES SHACKLE CHART

Shackle Material	Brass			Stainless Steel			Hardened Steel		
Series	11B	21B	41B	11B	21B	41B	11B	21B	41B
Shackle Diameter	1/4″	5/16″	3/8″	1/4″	5/16″	3/8″	1/4″	5/16″	3/8″
ASTM Grade	x	x	x	3	4	3	4	4	4
Cut Resistance	x	x	x	3	4	5	6	6	6
Corrosion	x	x	x	6	6	6	6	6	6
Tensil	x	x	x	4	4	4	4	4	4
Shock	x	x	x	6	4	3	4	4	4

PATENTS

Products protected by one or more of the following patents:

3,603,123	4,075,878	3,882,699
3,850,014	3,652,114	3,728,879
3,605,458	4,244,093	4,386,510
4,424,693	4,444,034	4,655,063
D290,085	Other patents pending.	

PATENTED KEYING

BEST Peaks®– For advanced solutions in key control and security, BEST offers Peaks®, the most adaptable and cost effective patented keying system on the market. The patented mechanism ensures that cylinders and cores will only operate with the Peaks® keys, which are only available through authorized BEST distributors.

For BEST products, Peaks® offers the security and convenience of a patented solution for interchangeable core. Peaks® is also available to adapt to a wide variety of locks from other manufacturers. All cylinders can be keyed into the same system, providing you the ability to operate all the locks at your facility using a single key, regardless of the lock manufacturer.

BEST Peaks®
Patented Keying

Specifications

Case– Machined from solid extruded brass or aluminum. Standard finish is 626 satin chromium plated.
Width– 1 5/8″
Length– 2 1/16″
Thickness– 25/32″
Shackle– The shackle locks at both heel and toe. The length of shackle opening is measured from top of case to inside of shackle when padlock is locked.
Material– Brass or stainless steel
Diameter– 1/4″
Width of opening– 7/8″
ASTM F883– Meets Grade 3 with stainless steel shackle.
ASTM F883– Meets Grade 6 for option E. (Corrosion resistance).

11B Padlock

11B72 Actual Size **11B722 Actual Size** **11B772 Actual Size** **11B782 Actual Size**

11B/12B – HOW TO ORDER

11B	7	2	T			
Shackle Diameter	**Core Housing**	**Shackle Height**	**Function Code**	**Chain Option**	**Special**	**Options Stamp No.**
11B– brass 1/4″ diameter **12B–** aluminum 1/4″ dia.	**7–** 7 pin housing accepts all Best cores	**Steel shackle** **2** – 3/4″ **22** – 1 1/2″ **72** – 2″ **82** – 4″ **Brass shackle** **0** – 3/4″ **20** – 1 1/2″ **70** – 2″ **80** – 4″	**T–**key retained **L–**non-key retained	**M–** case drilled for clevis only **M1–** bronze chain (11B only) **M5–** galvanize steel chain with gray polycoating (page 9)	**Blank–** Best logo **PS1010–** safety first (11B only) **(Specify padlock stamp number or describe stamp.** (11B only) Price for special stamps available upon request. (page 9)	**F3–** frangible shackle (11B720 only) **606–** satin brass (11B only) **ZZ–** double lockout (11B only) **Red–** anodized finish (12B only) **Black–** anodized finish (12B only) (pages 9-10)

21B/22B SERIES

Specifications

Case– Machined from solid extruded brass or aluminum. Standard finish is 626 satin chromium plated.
Width– 1 25/32″
Length– 2 1/16″
Thickness– 13/16″
Shackle– The shackle locks at both heel and toe. The length of shackle opening is measured from top of case to inside of shackle when padlock is locked.
Material– Bronze or stainless steel
Diameter– 5/16″
Width of opening– 7/8″
ASTM F883– Meets Grade 4 with stainless steel shackle.
ASTM F883– Meets Grade 6 for shackle cutting force with XSPL shackle option.
ASTM F883– Meets Grade 6 for option E. (Corrosion resistance).

21B Padlock

21B72 Actual Size **21B722 Actual Size** **21B772 Actual Size** **21B782 Actual Size**

21B/22B — HOW TO ORDER

21B	7	2	T			
Shackle Diameter	**Core Housing**	**Shackle Code**	**Function**	**Chain Option**	**Special Stamp No.**	**Options**
21B– brass 5/16″ dia. **22B–** aluminum 5/16″ dia.	**7–** 7 pin housing accepts all Best cores	**Steel shackle** **2** – 3/4″ **21** – 1″ w/shroud **22** – 1 1/2″ **72** – 2″ **82** – 4″ **Brass shackle** **0** – 3/4″ **20** – 1 1/2″ **70** – 2″ **80** – 4″	**T–** key retained **L–** non-key retained	**M–** case drilled for clevis only **M1–**bronze chain (21B only) **M5–** galvanize steel chain with grey polycoating (page 9)	**Blank–**Best logo **PS1010–**safety first (21B only) (**Specify padlock stamp number or describe stamp.** (21B only) Price for special stamps on request.) (page 9)	**606–** satin brass (21B only) **SH–** shrouded with cut resistant shackle (21B only) **WC–** weather cover **XSPL–**cut resistant shackle **Red–** anodized finish (22B only) **Black–** anodized finish (22B only) (pages 9-10)

Specifications

Case– Machined from solid extruded brass or aluminum. Standard finish is 626 satin chromium plated.
Width– 1 15/16″
Length– 2 1/16″
Thickness– 7/8″
Shackle– The shackle locks at both heel and toe. The length of shackle opening is measured from top of case to inside of shackle when padlock is locked.
Material– Bronze or stainless steel
Diameter– 3/8″
Width of opening– 7/8″
ASTM F883– Meets Grade 3 with stainless steel shackle, grade 4 with XSPL shackle.
ASTM F883– Meets Grade 6 for option E. (Corrosion resistance).
ASTM F883– Meets Grade 6 for shackle cutting force with XSPL shackle option

41B Padlock

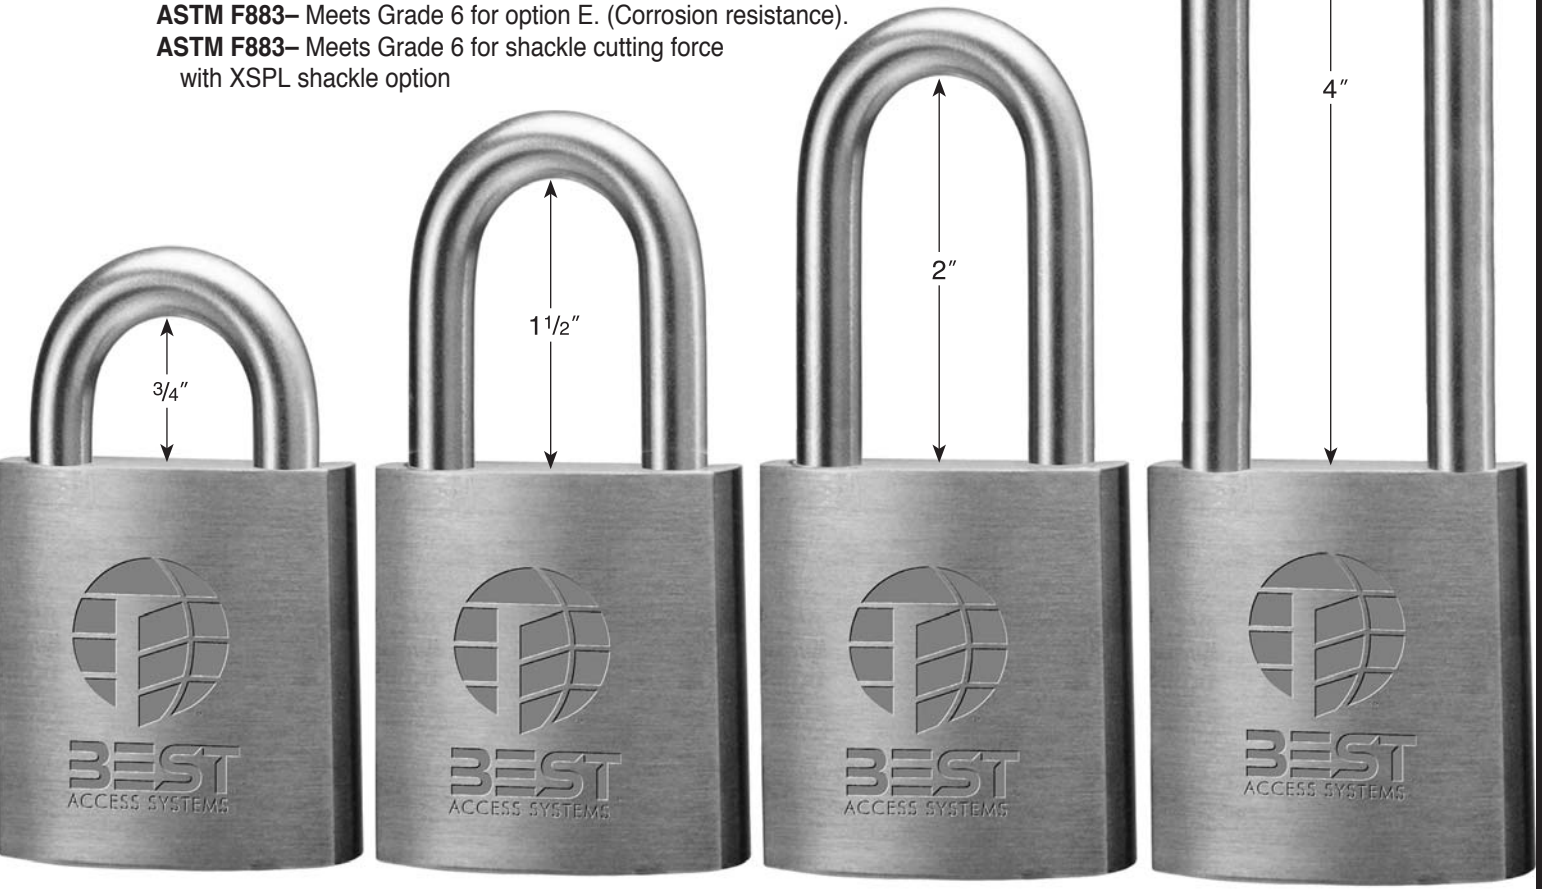

41B72 Actual Size | 41B722 Actual Size | 41B772 Actual Size | 41B782 Actual Size

41B/42B — HOW TO ORDER

41B	7	2	T			
Shackle Diameter	**Core Housing**	**Shackle Height**	**Function**	**Chain Option**	**Special Stamp No.**	**Options**
41B– brass 3/8″ diameter **42B–** aluminum 3/8″ diameter	**7–** 7 pin housing all Best cores	**Steel shackle** **2** – 3/4″ **22** – 1 1/2″ **72** – 2″ **82** – 4″ **Brass shackle** **0** – 3/4″ **20** – 1 1/2″ **70** – 2″ **80** – 4″	**T–** key retained **L–** non-key retained	**M–** case drilled for chain **M1–** bronze chain (41B only) **M5–** galvanize steel chain with gray polycoating (page 9)	**Blank–** Best logo (**Specify padlock stamp number or describe stamp.** (41B only.) Price for special stamps on request.) (page 9)	**606–** satin brass (41B only) **S–** car seal slot (41B only) **WC–** weather cover **XSPL–** cut resistant shackle **Red–** anodized finish (42B only) **Black–** anodized finish (42B only) (pages 9-10)

21BSH SHROUD OPTION

21B Padlock with Stainless Steel Shroud on hinge hasp (not supplied)

21B with Stainless Steel Shroud

Features & Benefits

- Cast stainless steel shroud with black powder-coated finish
- Through hardened shackle for cut resistance
- Utilized same internal components and body as standard 21B padlock
- Accepts all Best cores, with Standard, Premium, Peaks™ keying system
- Meets ASTM F883 Grade 4; meets Grade 6 for cut resistance
- Available in either key retained or non-key retained

21B SHROUD – HOW TO ORDER

21B	7	21	L			SH
Shackle Diameter	**Core**	**Shackle Housing**	**Function Code**	**Chain Option**	**Special Stamp No.**	**Options**
21B– 5/16″ dia.	**7–** 7-pin housing accepts all BEST cores	**21–** 1″ shackle opening	**T–** key retained **L–** non-key retained	N/A for shroud option	N/A for shroud option	**SH–** shroud with cut resistant shackle (21B only)

Specifications

Case– Machined from extruded brass. Standard finish 626 satin chromium plated.

Width– 1 25/32″

Length– 2 1/16″

Thickness– 27/32″

Shackle Cable: Diameter 1/8″ stainless steel. Length variable. 18″ standard unless specified other length.

Cable jacket: A tough plastic coating protects vulnerable surfaces. Measure cable length from top of case to top of case.

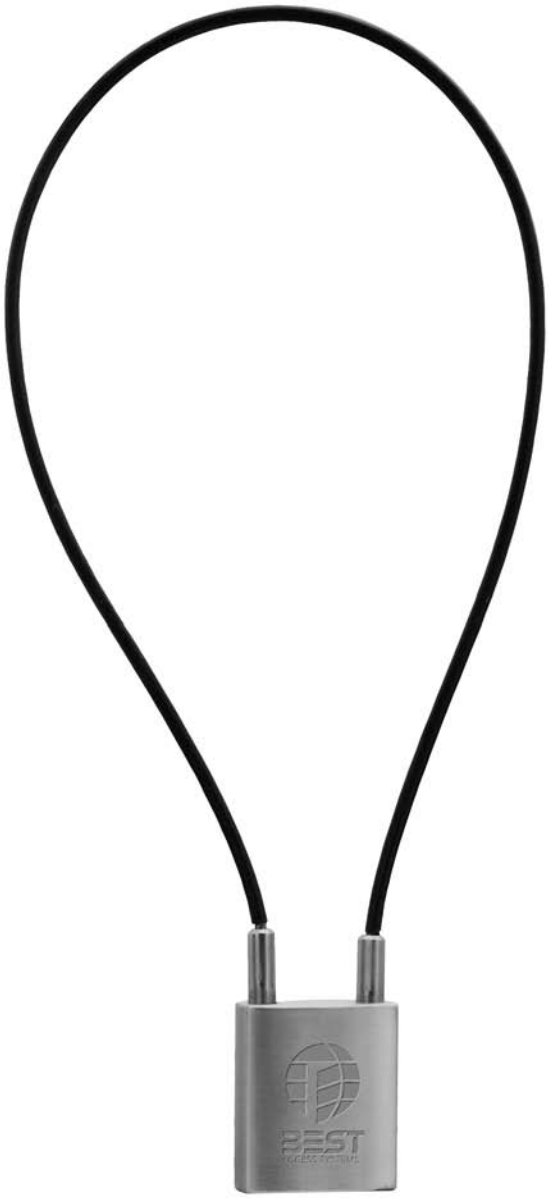

21JB7 - 18

21JB – HOW TO ORDER

Series Housing	Core Length	Cable	Options
21JB– cable padlock	**7–** 7 pin housing accepts all Best cores	**18–** 18″ **24–** 24″ **36–** 36″ **42–** 42″ **48–** 48″ **54–** 54″	**606–** clear coated satin brass

LOCKOUT / TAGOUT

OSHA requires that a Lockout/Tagout system be placed upon energy control devices to ensure that machines and equipment are isolated from all energy sources before employees perform service or maintenance activities. This is particularly necessary where the unexpected energization, start-up, or release of stored energy could cause injury or equipment damage. Stanley Security Solutions' Lockout/Tagout system includes six durable PVC vinyl coated BEST padlocks with Lockout/Tagout devices (11B/12B, 21B/22B, 41B/42B).

The OSHA vinyl coated padlocks will not chip or corrode. They also resist acids, oils or abrasions. Available is an OSHA accepted 6-padlock red polyresin coated aluminum lockout (BD655), and easy-to-read energy source identification tags. In addition to names of the workers, our tags can provide pertinent information, i.e. where the worker can be located. Details of OSHA Lockout/Tagout standard can be found in the code of Federal Regulations for labor at Title 29 part 1910.147, the control of hazardous energy Lockout/Tagout.

Lockout/Tagout Padlocks

Lockouts
BD655

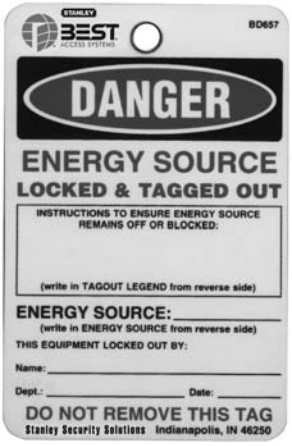

Front
Identification Tag
BD657 (includes one tie per tag)
Tagout Tag
BD658 (includes one tie per tag)

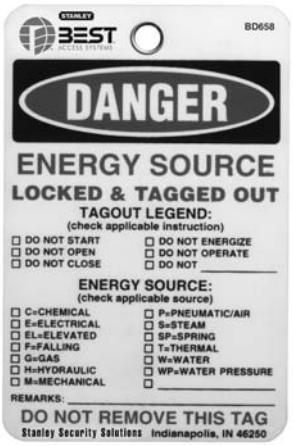

Back
Identification Tag

LOCKOUT/TAGOUT PADLOCKS — HOW TO ORDER

11B	7	2	T			O/ORA
Padlock Series	**Core Housing**	**Shackle Code**	**Function Option**	**Chain**	**Special Stamp No.**	**Options**
11B/12B– 1/4″ **21B/22B–** 5/16″ **41B/42B–** 3/8″	**7–** 7 pin housing accepts all Best cores	For specific order procedures and complete specifications, see pages 3 through 7				**Vinyl Cases** **O/RED–** Red **O/YEL–** Yellow **O/BLU–** Blue **O/BLA–** Black **O/ORA–** Orange **O/GRE–** Green

Special Stamped Padlocks

Upon special request, and at no charge other than the initial cost of the die, BEST padlocks may be die-stamped with the customer's identification as specified. If stamp has been previously ordered, specify stamp number. (Brass padlocks only.)

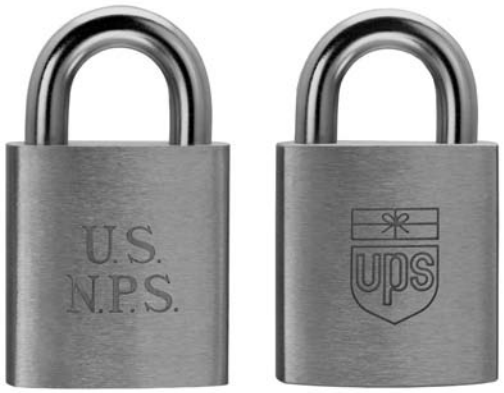

Samples of Padlock Stamping

F3– Option Frangible Shackle

Available in 11B series only. The frangible shackle pad lock is designed for fire and safety equipment, cabinets, etc. where casual entry needs to be prevented. During emergency, the shackle may be snapped by a hard blow or strong, steady pressure permitting entry without use of a key. (Check lock regulations). A brass 1 1/2″ – number 20 size shackle is made frangible through use of special break point. Broken shackles are easily replaced in the field and may be ordered separately. A complete frangible shackle kit (including three frangible shackles, three shackle springs and one padlock disassembly tool) may be ordered with each padlock order.

To order kit specify: 11BFK

Frangible Shackle Kit

M-Option Chains

Chains may be supplied with padlock. When ordering clevis and chains, add M1 or M5 to padlock nomenclature. Standard chain length is 9″, special length chains available upon request.

M1 – 9″
Bronze Chain

M5 – 9″
Galvanized Steel Chain with Gray Plastic Polycoat Cover

ACCESSORIES AND OPTIONS

S– Option Car Seal Feature

Available in all 41B padlocks. Case is slotted below the core to accommodate most popular car seal bands. When in place, car seal band insures tampered with. Seals are available direct from car seal manufacturers. A special long blade key is required for 7-pin systems. When ordering simply add “S” to the option column of the 41B nomenclature.

41B car seal feature

SH– Option Shrouded Padlock

Available in 21B padlocks. Cast stainless steel shroud with black powder-coated finish. Features hardened shackle for cut resistance. When ordering add “SH” to option column of the pad lock nomenclature.

21B shroud option

WC– Option Weather Covers

Available in 21B/22B and 41B42B padlocks. The padlock weather covers are molded durable PVC that won’t chip or corrode and resists acids, oils and abrasion. When ordering add “WC” to option column of the padlock nomenclature.

21B & 41B weather option

ZZ– Option Double Lockout/Safety First

Available in 11B only, the double lockout safety padlock provides additional safety for maintenance crews making repairs in widely separated areas. The shackles of 11B padlocks are passed through holes in the extended skirt at the base of this lock. As long as either 11B padlock remains in place, the lock-out safety padlock cannot be unlocked. Elliptical solid brass case is 1 1/2″ wide and is stamped with words ***“Safety First ”*** on one side. Holes at base of case will accommodate 11B shackles only. Minimum shackle opening should be 1 1/4″. A long blade key is required for 7-pin systems. Dust cover cannot be used with double lockout.

11B double lockout option

PADLOCK REPAIR AND PARTS

11B/12B – 21B/22B – 41B/42B Series

With the simplest of tools, proper replacement parts and minimal training, all BEST padlocks can be used for the duration of any installation. Listed below are the parts and tools required for the various series of padlocks. Contact your local Stanley Security Solutions office for special instruction and information about factory seminars for padlock repair. BEST padlocks can be repaired and worn parts replaced, virtually eliminating padlock replacement costs.

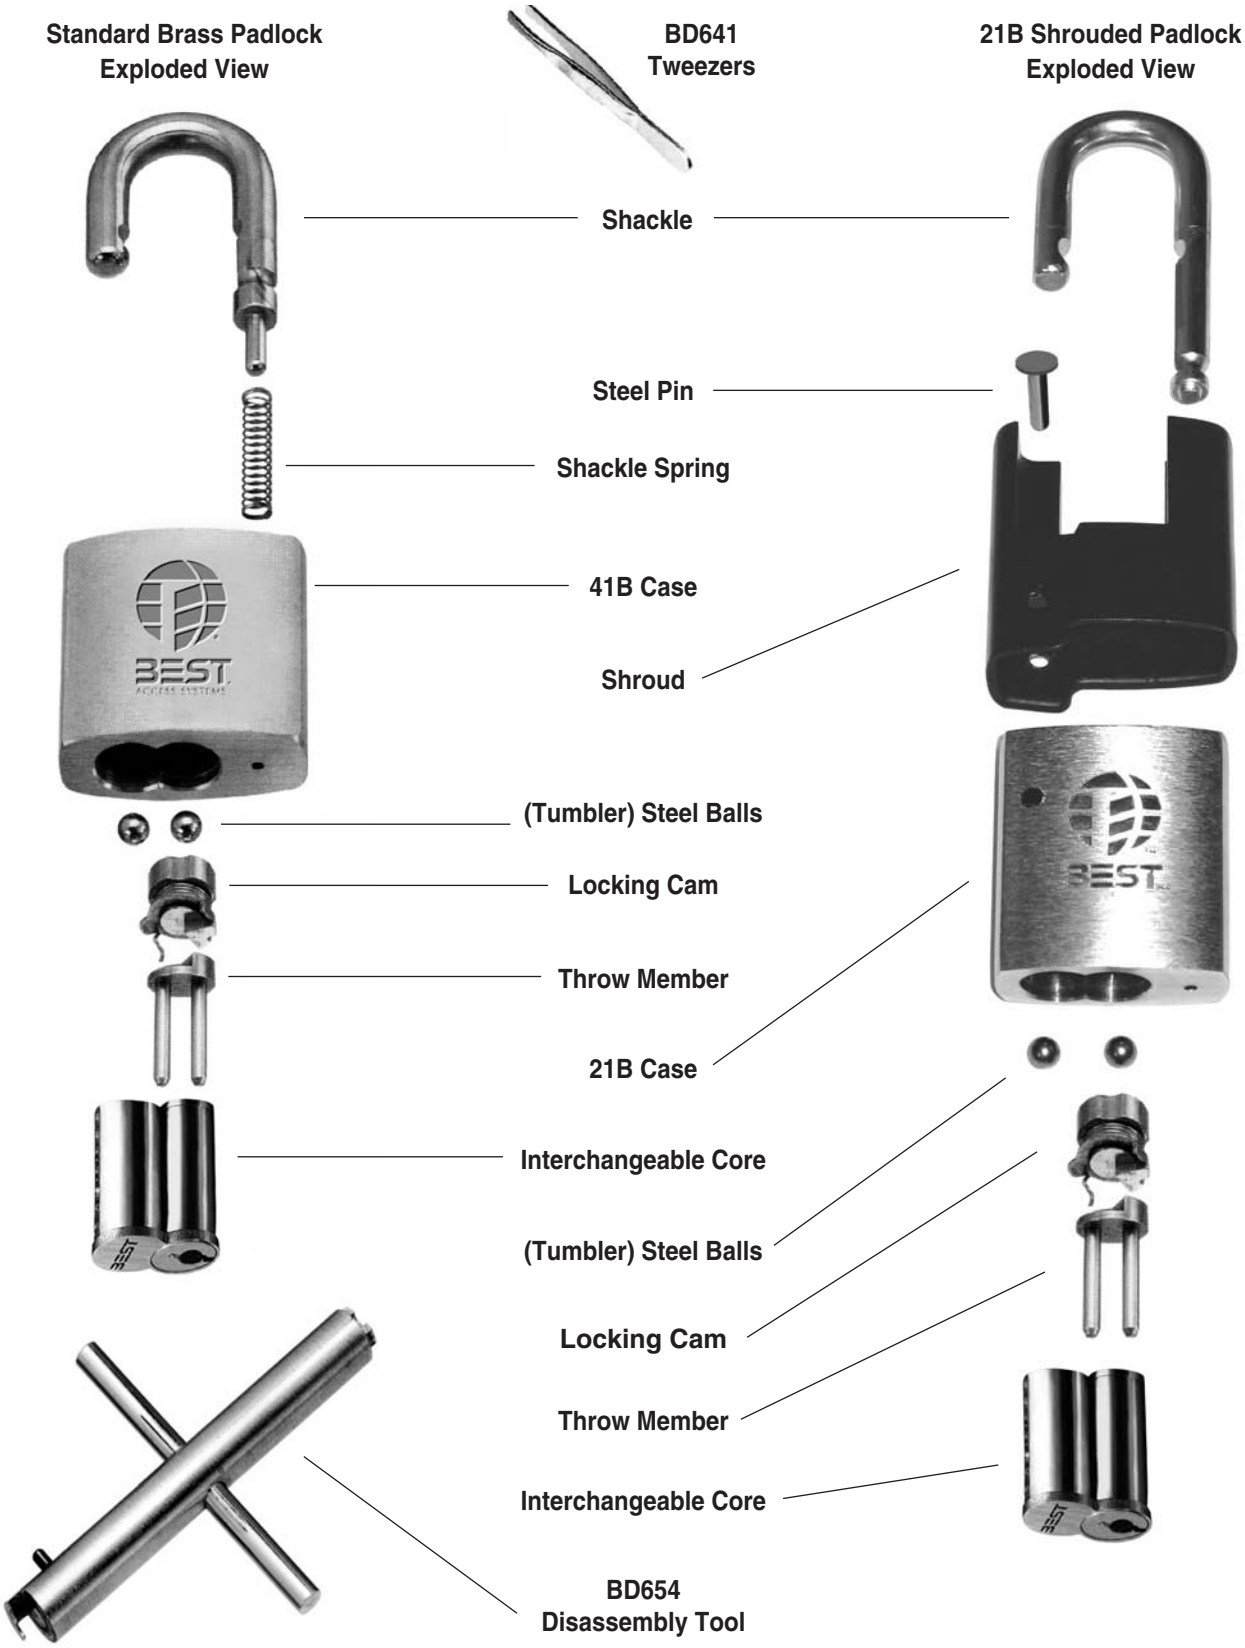

For more information on Stanley Security Solutions' products, services, and office locations visit our web site at www.stanleysecuritysolutions.com

Product information contained in this catalog has been compiled and presented with as much care and completeness as is reasonably possible. Errors or mistakes may be present, and in many cases, reliance has been placed on information supplied by other manufacturers which may be in error or which may be subject to changes or modifications by the manufacturer without notice and without obligation. Therefore, no guarantee can be made or should be assumed or implied with regards to product information contained in this catalog.

STANLEY®
Security Solutions

Stanley Security Solutions, Inc.
6161 E. 75th Street Indianapolis, Indiana 46250
www.stanleysecuritysolutions.com
© 2007 Stanley Security Solutions, Inc. and Stanley Logistics

10M 707
BAS028